




Graph 1 Electrical life, ops x 10⁶

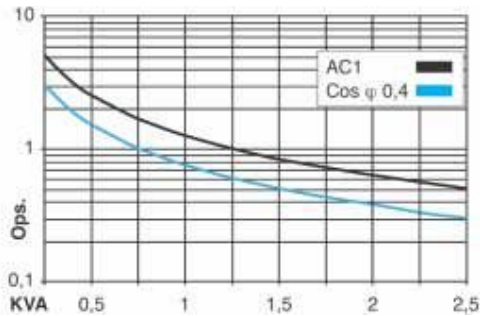

Graph 2 Max. DC load

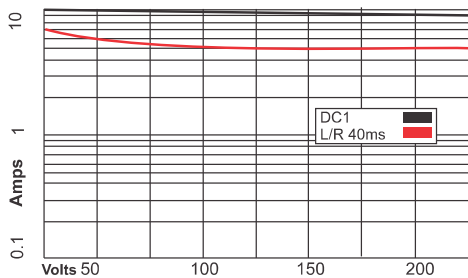

Dimensions in mm.

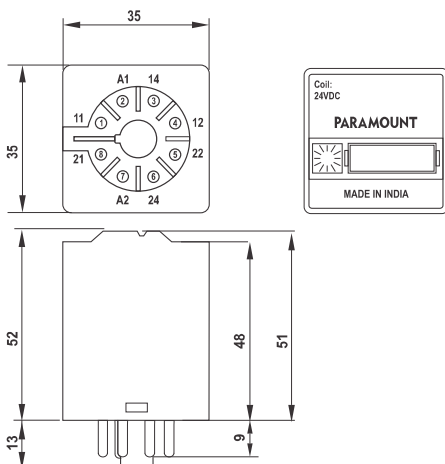

P3-X.....M



Magnetic Blow Out 1 NO + 1NC Contacts

10 A 250V AC1 10 A 220V DC1
10 A 30V DC1 5 A 220V DC13

Contacts

Materials : Standard AgNi
Optional 1 AgNi + Au 0.2 μ
Optional 2 AgNi + Au 5.0 μ
Max. Switching Current 10A
Max. Peak Inrush Current (20 ms) 30A
Max. Switching Voltage 250 VAC
Switching Power range 0.3 VA (W) to 2500 VA
Max. Contact Resistance 20m Ω
Max. AC Load (Table 1) 2.5 KVA

Coils (Ohms ± @ 20°C)

Pull-in Voltage ≤ 0.8 x Un
Drop-out Voltage ≥ 0.1 x Un

Nominal Coil Power 1.6 VA (AC / 1.3 W (DC))

VAC	Ohms	VDC	Ohms
6	3.15	6	33
12	13.3	12	115
24	52	24	480
48	240	48	1850
110	1120	110	9000
230	5600	220	29000

Insulation

Dielectric Strength (1 minute) : open contacts 2000 VAC
Between adjacent poles 2000 VAC
Between contacts and coil 2500 VAC
Insulation Resistance @ 500VDC Min. 200 MΩ
Isolation, IEC 61810-5 2.5 KV / 3

Specifications

Operate / Release & Bounce Time Max. for DC 20+3 ms
Operate / Release & Bounce Time Max. for AC 20+8 ms
Mechanical Life ops. 10 Million AC, 20 Million DC relays
Electrical life at Nominal load ≥ 100,000 ops.
Operating Frequency at nominal load 1200 / hour
Shock Resistance AK : > 10g
Vibration Resistance 5g 10.....150 Hz
Mounting Direction any
Storage -40°C to +85°C
Ambient Operating Temperature -40°C to +55°C (for AC relay)
Ambient Operating Temperature -40°C to +70°C (for DC relay)
Protection Standard IP 40
Weight app. 80 g

Standard Types

AC : 6, 12, 24, 48, 110, 230

M = Magnetic Blow Out

P = LED Indicator

R = RC Circuit

DC : 6, 12, 24, 48, 110, 220

P = LED

W = Free Wheeling Diode

Z = Polarity & Free Wheeling Diode

B = AC/DC Bridge Rectifier

P3-X-PM VAC

P3-X-PRM VAC

P3-X-PM VDC

P3-X-PWM.... VDC

P3-X-PZM VDC

P3-X-PBM VAD

Suitable Sockets : S8D-X, S8LD-X

Approvals

