




S12LD

Only
28.7 mm
WIDE

**Socket for P12 Relays (10 A) DIN Rail
or Panel Mountable**

Wiring Diagram

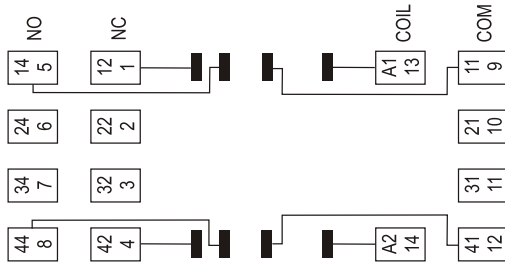


Specifications

Poles: 2 Change Over Contact
Nominal load : 10A / 250 VAC
Insulation: Di-electric strength, 1minute
Between contact and coil: 2.5 KV
Between all terminals and DIN Rail: 2.5 KV
Between adjacent terminals: 2.5 KV
Weight Approx. 61 gms.

Dimensions


in mm.

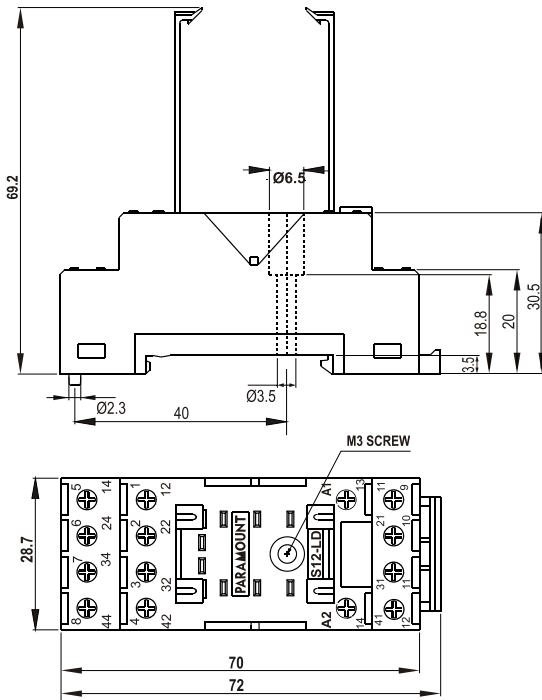

Other Aspects

DIN Rail / Panel Mountable
EN / DIN Sequential Numbering according to
EN 60947 & IEC 61810
Integrated Relay Hold Down Clip
Removable White Marking Label
Hard Brass Tin Plated Terminals
Brass Tin Plated Screw

Accessories



Fork / C type crimped Terminal
used for wire connection

Accessories

Fork / C - Terminal for Wire connection

Approvals

