




# S14LD

Only  
**28.7 mm**  
WIDE

**Socket for P14 Relays (7A) DIN Rail or Panel Mountable**

## Wiring Diagram

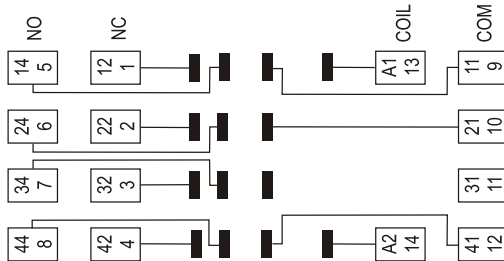


## Specifications

Poles	4 Change Over Contact
Nominal load :	7A / 250 VAC
<b>Insulation:</b> Di-electric strength, 1minute	
Between contact and coil	2.5 KV
Between all terminals and DIN Rail	2.5 KV
Between adjacent terminals	2.5 KV
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi

## Dimensions


in mm.

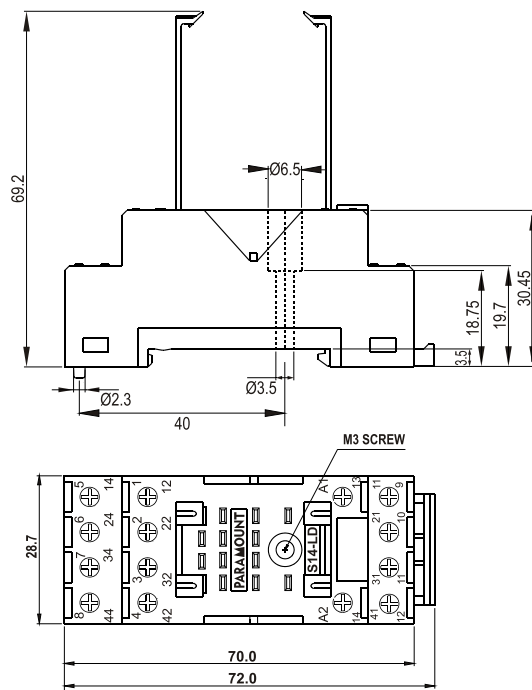

## Other Aspects

- DIN Rail / Panel Mountable
- EN / DIN Sequential Numbering according to EN 60947 & IEC 61810
- Integrated Relay Hold Down Clip
- Removable White Marking Label

## Accessories



Fork / C type crimped Terminal used for wire connection

## Accessories

Fork / C - Terminal for Wire connection

## Approvals

