

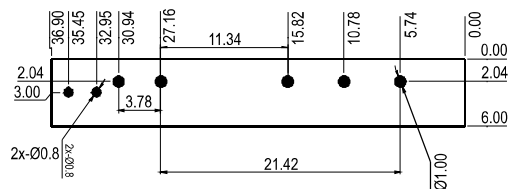


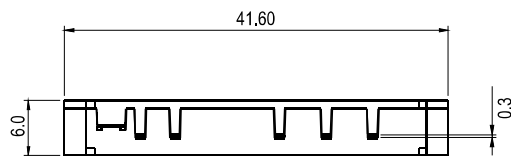

Dimension in mm

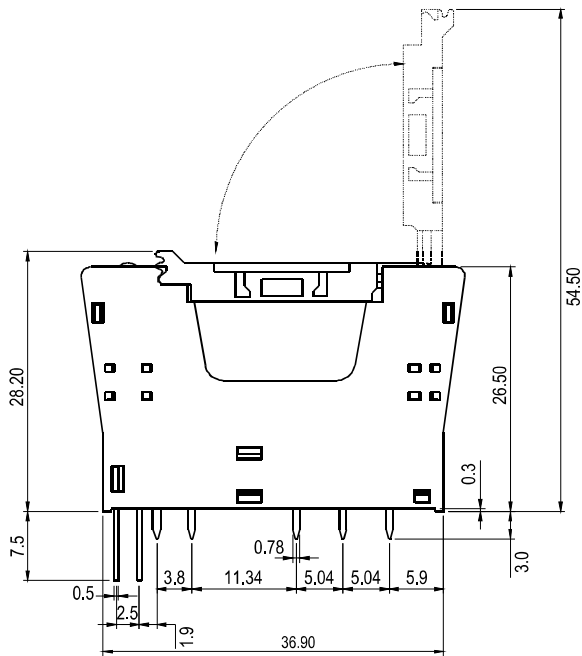

S5PP

**PCB Mountable Slim Sockets with
PCB Pin Terminal Slim Relays**

Specifications

Rate Current	: 6A
Rated voltage / max. Switching voltage AC	: 300 VAC
Die electric strength coil-contact circuit	: 5,000 Vrms
Clearance / Creepage coil-contact circuit	: ≥ 4/4 mm
Insulation to IEC 60664-1	
Type of insulation coil-contact circuit	: Reinforced
Open contact circuit	: Functional
Rated voltage system	: 230 / 400 V
Over voltage category	: III
Ambient temperature range	: -40° +70° C
Terminals	: PCB
Weight	: 3.54 gms

Features:

- Module width 6.2 mm
- Socket are with built-in & Coil Power on LED
- No reduction of protection class or creepage / clearance with plastic retainer
- Easy replacement of relays

Approvals