




P 122

Recessed Type

3/8"(10 mm) dia mini with wire leads.

Dimensions in mm.

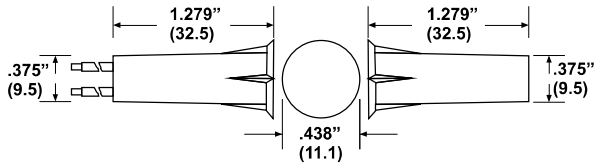

For mounting drill 3/8"(10 mm) hole
(Dimensions in brackets are in mm)

Specifications

- 3/8" (10mm) press fit mount
- Added security of Recessed mounting
- Heavy duty housing with crush resistant construction

Ordering Information	Gap Size	Loop	Lead Type
P 122	3/4" (19 mm)	Closed	#22 AWG WIRE 18" (450mm) LONG

Reed Switch Specification :-

Contact Type : Normally Open Switch N/O Contacts
(Form 'A') [standard]
[Form 'B'-N/C OR Form 'C' -C/O
contact type are given on request]

Contact Resistance : 100m ohms Max.

Contact Rating : Switching current 0.4 Amps

Max. Carry Current : 1A,

Power consumption : 10 VA

Max. Switching Voltage : 100 VDC

Life Expectance : 10 million operations




P 125

Recessed Type

3/8"(10mm) dia flanged with wire leads.

Dimensions in mm.

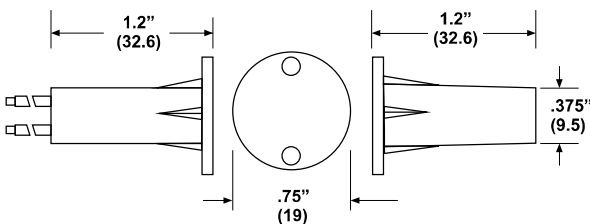

For mounting drill 3/8"(10 mm) hole
(Dimensions in brackets are in mm)

Specifications

- Flange for secured mounting including over size holes
- Security of recessed mounting
- Supplied with mounting screws

Ordering Information	Gap Size	Loop	Lead Type
P 125	3/4" (19 mm)	Closed	#22 AWG WIRE 18" (450mm) LONG

Reed Switch Specification :-

Contact Type : Normally Open Switch N/O Contacts
(Form 'A') [standard]
[Form 'B'-N/C OR Form 'C' -C/O
contact type are given on request]

Contact Resistance : 100m ohms Max.

Contact Rating : Switching current 0.4 Amps

Max. Carry Current : 1A,

Power consumption : 10 VA

Max. Switching Voltage : 100 VDC

Life Expectance : 10 million operations